



For people & the environment

### ECO-PITATTO PANEL Multi-Purpose Soundproof Panel

PAT-4427601



TOYU ECOSUPPORT CO.,LTD.



**ECO-PITATTO PANEL** 

### 01 Performance



Sound insulation

Sound absorption

Resistance to weathering

Thermal Resistance

Soundproofing
-15dB



# - PITATIO PANEL Easily snaps into place

- Quickly creates a soundproofing barrier
  - Outstanding sound insulation by two-layer structure of temporary hoarding and ECO-PITATTO PANEL
    - Embedded with glass wool for absorption of reflected sound
      - OPanels can also be used by themselves

### Installation example

Perfect for all your soundproofing needs



noise made by generators



noise made by truck operation



noise made by compressors




noise made by large machinery



**ECO-PITATTO PANEL** 

## **02**Construction


- OPowerful magnets and hanging hooks for securely attaching panels to temporary hoarding
- OEasy installation & dismantle (8kg per panel)
- **Quick installation**

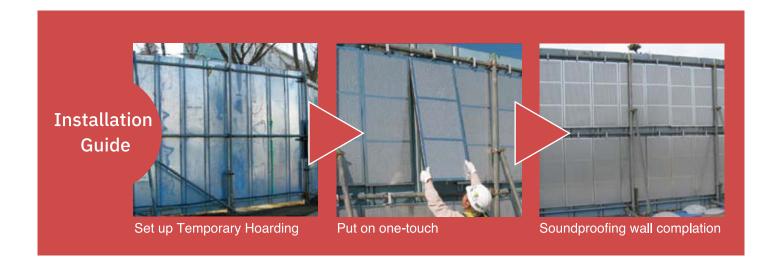

**ECO-PITATTO PANEL** 

03 Economical

- OShortens the construction period and saves labor costs
- Reasonably-priced panel for attachment to temporary hoard -ing and scaffolding pipe
- OReusable panel

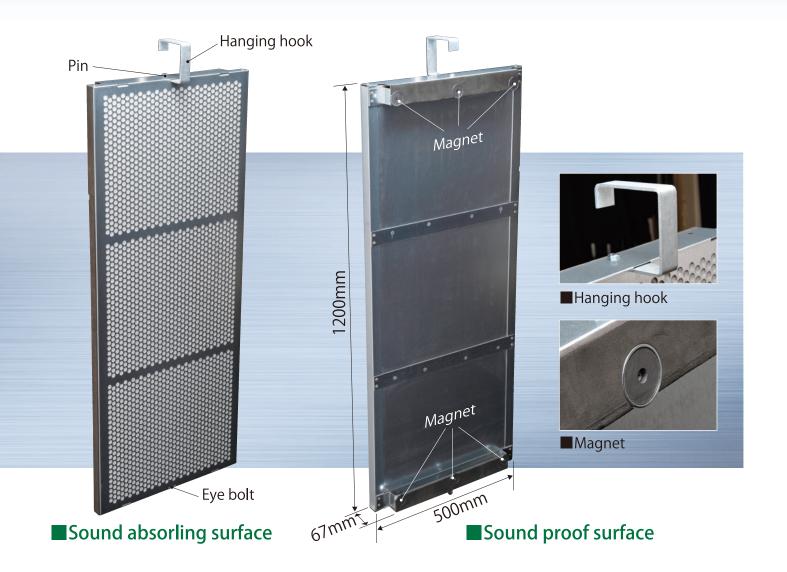



### Performance table

#### [Specification]

- ●Brand name: ECO-PITATTO PANEL
- ●Panel material: Galvanized steel 1mm
- •Sound absorbing material : Glass wool with fluorine bag 25mm
- •Size: 500mm(width) × 1200mm(height)

 $\times$ 67mm(depth)

●Weight: 8kg

### Paformance test data

**ECO-PITATTO PANEL** Temporary Hoarding

	Hz					
	125	250	500	1k	2k	4k
TL (dB)	13.9	18.1	27.1	39.5	51.4	58.5
а	0.16	0.71	0.76	1.01	0.81	0.43



#### **TOYU ECO SUPPORT CO.,LTD**

Daiichi-dempa Bldg. 3F 2-4-4 Sotokanda, Chiyoda-ku, Tokyo 101-0021, Japan TEL:+81-3-5809-2171 FAX.+81-3-5809-2172

http://www.tohyu-eco.co.jp