


For people & the environment

ECO-PITATTO PANEL

Multi-Purpose
Soundproof Panel

PAT-4427601

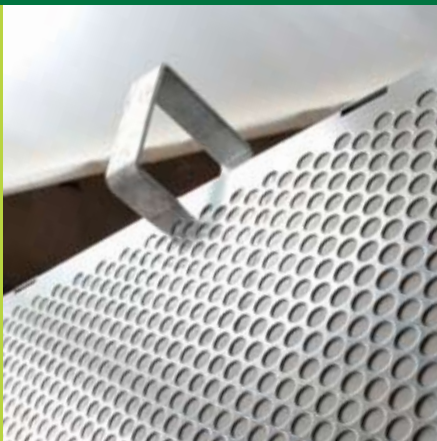

TOYU
ECOSUPPORT
CO.,LTD.

TOYU

ECO - PITATTO PANEL

01 Performance

ECO



Sound insulation


Sound absorption

Resistance to weathering

Thermal Resistance

Soundproofing

-15dB

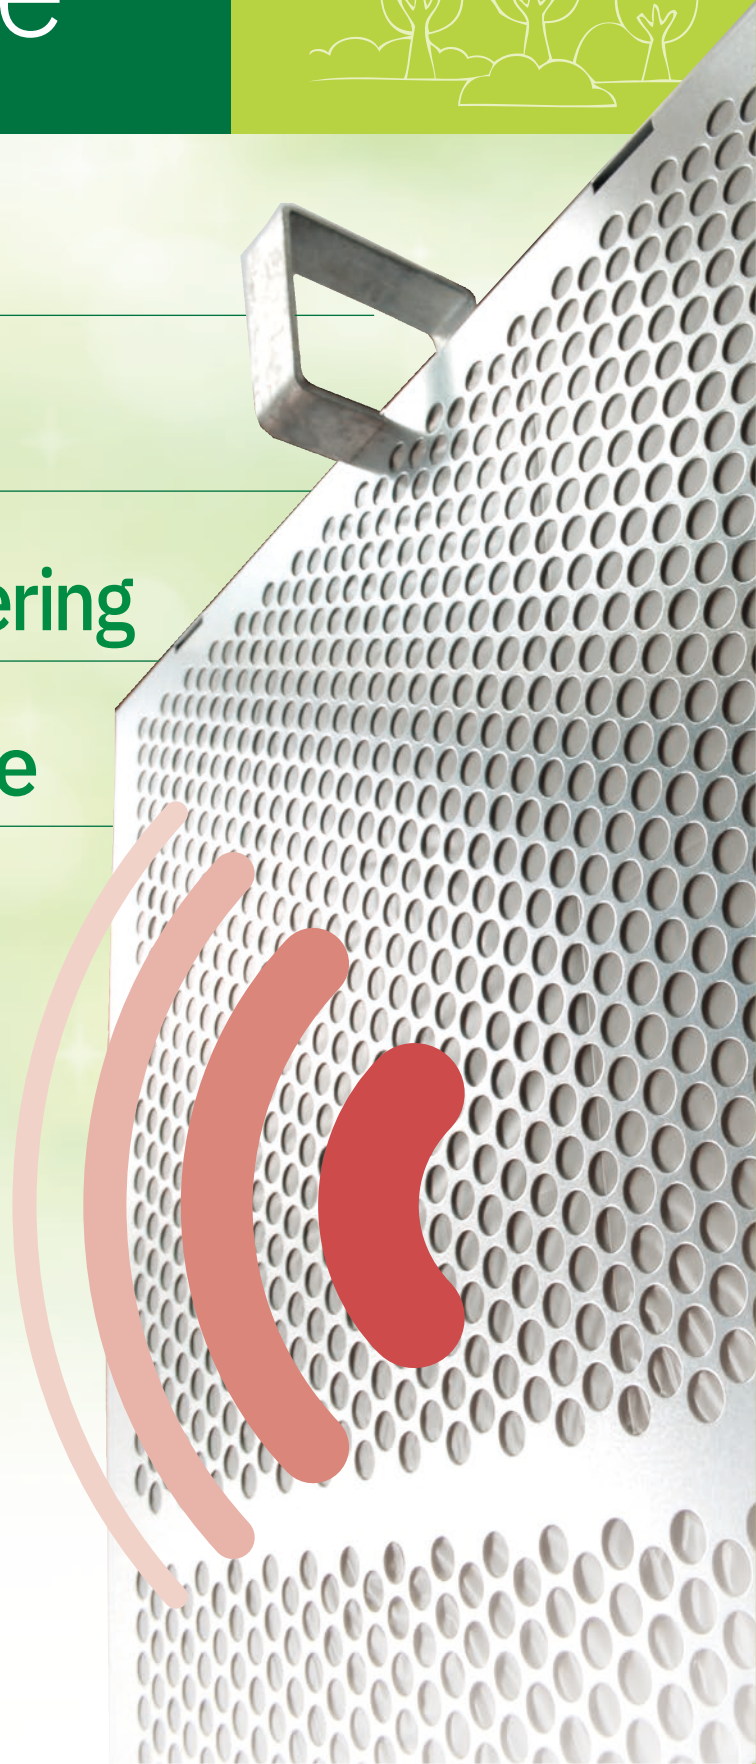

-PITATTO PANEL

Easily snaps into place


- Quickly creates a soundproofing barrier
- Outstanding sound insulation by two-layer structure of temporary hoarding and ECO-PITATTO PANEL
- Embedded with glass wool for absorption of reflected sound
- Panels can also be used by themselves

Installation example

Perfect for all your soundproofing needs



noise made by generators

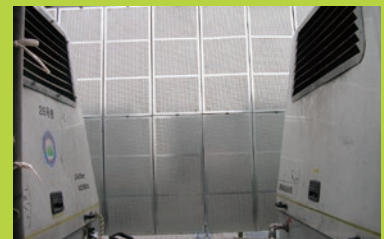

noise made by compressors



noise made by truck operation



noise made by large machinery



ECO-PITATTO PANEL

02 Construction

- Powerful magnets and hanging hooks for securely attaching panels to temporary hoarding
- Easy installation & dismantle (8kg per panel)
- Quick installation

Installation Guide



Set up Temporary Hoarding



Put on one-touch





Soundproofing wall completion

ECO-PITATTO PANEL

03 Economical

- Shortens the construction period and saves labor costs
- Reasonably-priced panel for attachment to temporary hoarding and scaffolding pipe
- Reusable panel

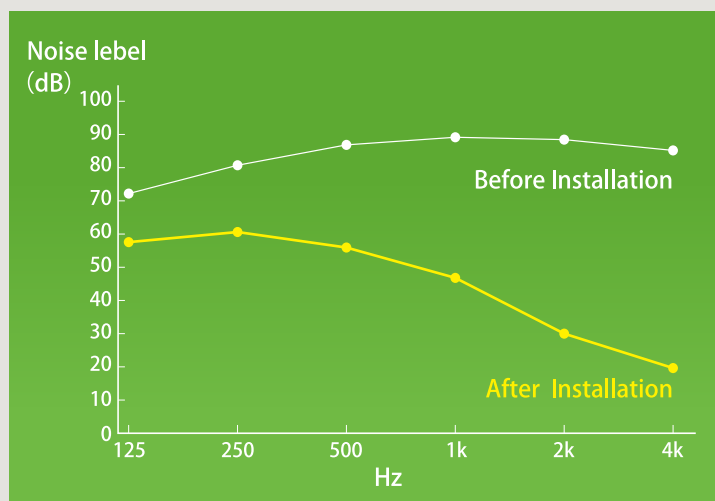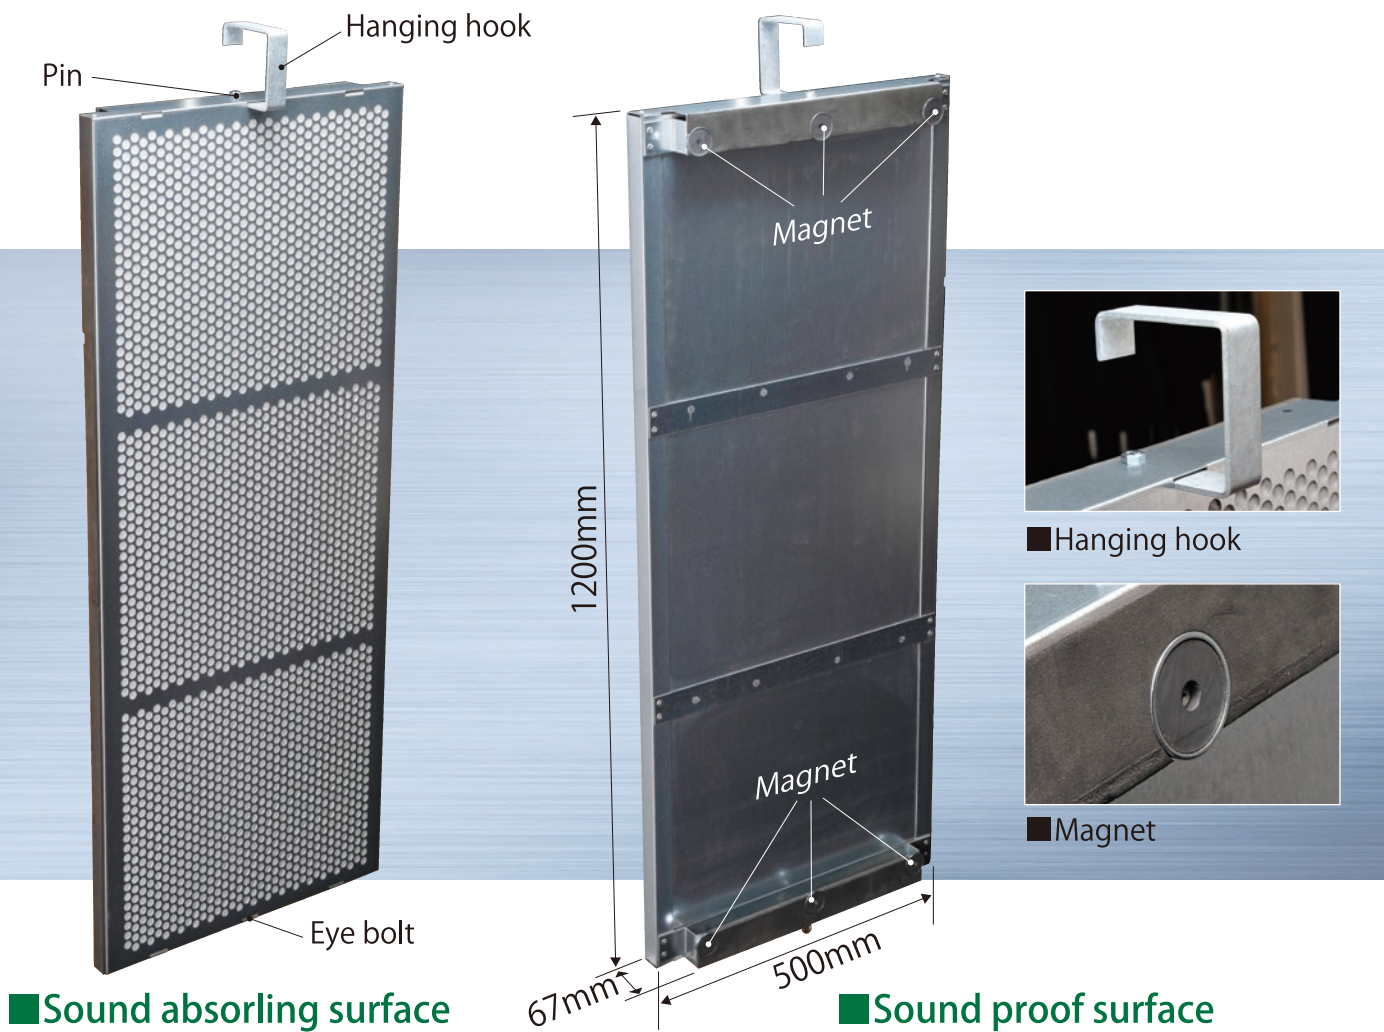

Performance table

【Specification】

- Brand name : ECO-PITATTO PANEL
- Panel material : Galvanized steel 1mm
- Sound absorbing material : Glass wool with fluorine bag 25mm
- Size : 500mm(width) × 1200mm(height) × 67mm(depth)
- Weight : 8kg

Performance test data

ECO-PITATTO PANEL
+
Temporary Hoarding

	Hz					
	125	250	500	1k	2k	4k
TL (dB)	13.9	18.1	27.1	39.5	51.4	58.5
α	0.16	0.71	0.76	1.01	0.81	0.43

TOYU
ECOSUPPORT
CO.,LTD.

TOYU

TOYU ECO SUPPORT CO.,LTD

Kandasudacho Bldg. 5F

2-2-2 Kandasuda-cho Chiyoda-ku Tokyo 101-0041 Japan

TEL:+81-3-5809-2171 FAX.+81-3-5809-2172

<http://www.tohyu-eco.co.jp>